

# BRICKWERK NEW



EXPRESSIVE COAL FIRING AND  
RING FURNACE LOOK,  
INNOVATIVELY ACCENTED.



8140/650  
Gepard Surround SU11 F03M floor tiles. Catalogue available separately or at: [www.gepardi.co.uk](http://www.gepardi.co.uk)

## AUTHENTIC COAL FIRING AND RING FURNACE CONTOURING ON FULL BODY.


Intensive colouring, pronounced bulges and prints, set marks, burn outs and sooty smoke flags on the firing skin: authentic and innovative, Brickwerk reinterprets the typical coal firing and ring furnace look of historic clinker bricks.

Entirely without aggregates such as coal or peat, the traditional clinker production is revolutionised with state-of-the-art, high-tech glaze technology. Innovative surface technology powerfully accentuates the surface of the Brickwerk clinker brick slips, which are coloured right through. Haptic as well as optical effects. Intense colour brilliance; full of character. While also being completely natural and resource-friendly. Brickwerk is available in six colours in NF/DF format.

# BRICKWERK <sup>NEW</sup>

## AUTHENTIC. INTENSIVE COLOUR BRILLIANCE. FULL-BODY.

### FIRINGS AND FORMATS

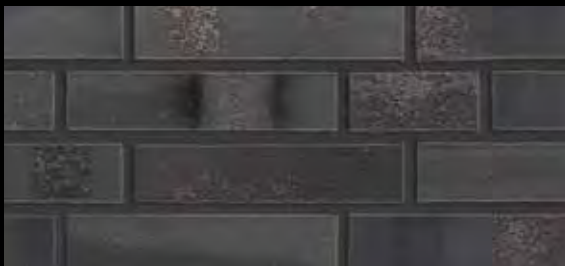


**650 eisenschwarz**  
Δ < 3 % · DIN EN 14411, Gr. AII<sub>0</sub>



**651 aschgrau**  
Δ < 3 % · DIN EN 14411, Gr. AII<sub>0</sub>



**652 moorbraun**  
Δ < 3 % · DIN EN 14411, Gr. AII<sub>0</sub>



**653 kupferrot**  
Δ < 6 % · DIN EN 14411, Gr. AII<sub>0</sub>-Part1



**654 flammenrot**  
Δ < 6 % · DIN EN 14411, Gr. AII<sub>0</sub>-Part1



**655 violettrot**  
Δ < 6 % · DIN EN 14411, Gr. AII<sub>0</sub>-Part1





## PRODUCT DETAILS

### BRICKWERK

DIN EN 14411



format no.	8145	8140	8146	8141	8148	8143
description	clinker brick slips	clinker brick slips	corner <sup>1)</sup>	corner <sup>1)</sup>	lintel angle	lintel angle
nominal size (cm)	NF	DF	NF	DF	NF	DF
production size (mm)	240 x 71 x 12	240 x 52 x 12	240 x 50 x 71 x 12	240 x 50 x 52 x 12	240 x 71 x 50 x 12	240 x 52 x 50 x 12
650 eisenschwarz	★ PG 445 ●	★ PG 445 ●	★ PG 763 ●	★ PG 757 ●	★ PG 81 ○	★ PG 794 ○
651 aschgrau						
652 moorbraun						
653 kupferrot	★ PG 448 ●		★ PG 766 ●		★ PG 82 ○	
654 flammenrot						
655 violettrot						
pieces per bundle	39	52	22	22	12	18
pieces per m <sup>2</sup> /m incl. joint	48,00	64,00	12,50	16,13	4,00	4,00
pieces per pallet	3.159	4.212	1.430	1.430	912	972
m <sup>2</sup> /m per bundle	0,81	0,81	1,76	1,36	3,00	4,50
m <sup>2</sup> /m per pallet	65,81	65,81	114,40	88,65	228,00	243,00
bundles per pallet	81	81	65	65	76	54
kg per pallet	1.374	1.474	679	490	648	573
kg per piece	0,435	0,350	0,475	0,343	0,710	0,590
kg per m <sup>2</sup> /m	20,880	22,400	5,938	5,533	2,840	2,360
kg per bundle	16,965	18,200	10,450	7,546	8,520	10,620
surcharge	❖	❖	❖	❖	❖	❖

★ = Discount on pallets. ● = Normally available ex stock. ○ = Made to order – delivery terms upon request. PG = Price group (please see current price list).  
❖ = Minimum quantity: each open box will incur a surcharge. <sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.



Completely frost-resistant  
\*25 year guarantee



Suitable for  
insulation systems



Weatherproof



Economic



In compliance  
with DIN EN



Fade-free and  
colourfast



Easy maintenance  
and hygienic



Ecofriendly



Resistant to  
chemicals



Glow-resistant  
and fireproof



Anti-static